



FD12H-120 鑽孔主軸頭

■ 規格

| | |
|-------|---|
| 使用油壓 | 30~40kg/cm ² |
| 鑽孔能力 | φ30(S45C) |
| 主軸規格 | HSK-63C |
| 馬力 | 1.5kw~3.7kw, 220V/440V, 50Hz/60Hz |
| 容許迴轉速 | 3,600rpm |
| 重量 | 185kg |
| 總行程 | 120mm |
| 油壓缸直徑 | φ120 |
| 流量控制閥 | FCC-G02-4 |
| 傳動輪方式 | 8YU |
| 油壓缸面積 | 前進34.6cm ² , 後退26.5cm ² |
| 推力 | 1308kg(使用壓力30kg/cm ²) |

■ 消耗品



| | |
|--------|--|
| 主軸軸承 | a. 32010x1, 6010Zx1, 32008x1, 6008Zx1 |
| | b. 7010x3, 7008x2 |
| 皮帶輪軸承 | 7011x2, 6012ZZx1 |
| 前蓋油封 | SDR105-115-8x1, SKY105-120-9x1, G-120x1 |
| 中間襯套油封 | SDR100-110-8x1, C1-A010 N3571x1, G-115x1 |
| 鎖緊螺帽 | MR50x1.5P, MKR40x1.5P, MR55x2.0P |





FD12H-120 Drilling Unit

尺寸圖

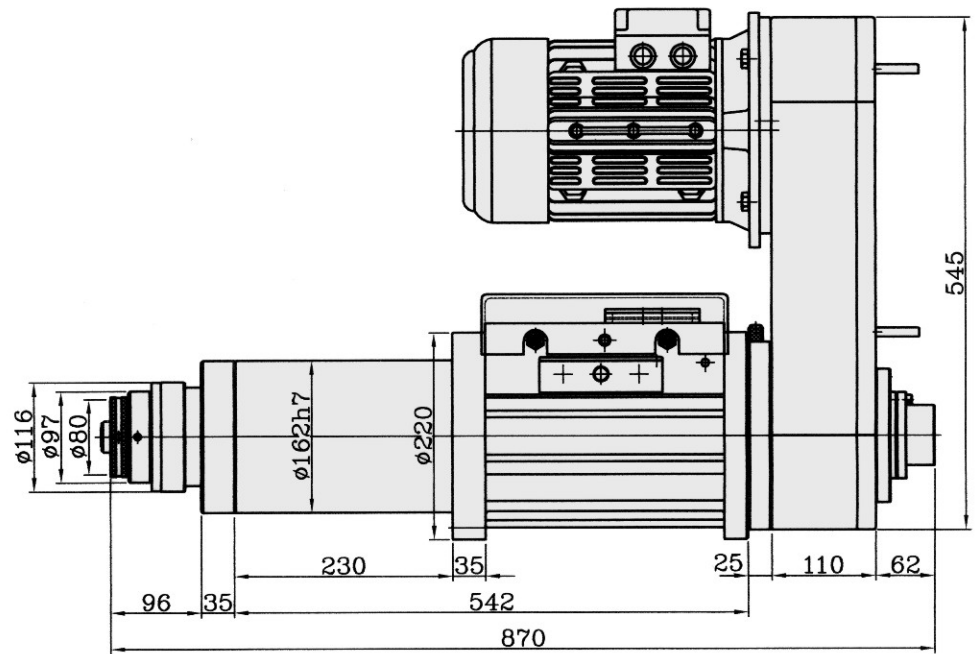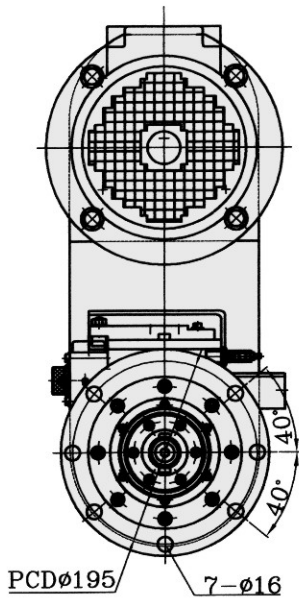

FD12H-120-HSK63C

